SPECIFICATION





LOA Hull length		15.97 m 15.25 m	52' 5" 50' 0"
LWL		14.50 m	47' 7"
Beam		4.91 m	16' 1"
Draft			
shallow keel		1.98 m	6' 6"
L-keel, medium		2.43 m	8' 0"
Displacement			
shallow keel	approx.	16.94 t	37,346 lbs
L-keel, medium	approx.	16.54 t	36,464 lbs
Ballast			
shallow keel	approx.	4.76 t	10,494 lbs
L-keel, medium	approx.	4.36 t	9,612 lbs
Engine Diesel			
standard	approx.	80 PS	80 hp
option	approx.	110 PS	110 hp
Fuel tank	approx.	200 I	53 gal
Fresh water	approx.	450 I	119 gal
CE Certifcate	A - 12		
Design	Berret - Racoupeau		
Interior	Berret - Racoupeau		




Mast length above WL	approx.	23.55 m	77' 3''
Upwind sail area	approx.	125.50 m ²	1,350 sq ft
Downwind sail area	approx.	272.00 m ²	2,927 sq ft
Main sail			
standard	approx.	66.00 m ²	710 sq ft
furling	approx.	66.00 m ²	710 sq ft
Jib	approx.	53.00 m ²	570 sq ft
Genoa	approx.	59.50 m ²	640 sq ft
Reacher	approx.	94.00 m ²	1,011 sq ft
Gennaker	approx.	206.00 m ²	2,217 sq ft

All measurements/figures are approximate. Errors and omissions excepted. All weights are specified in MLC. Specification and material can be changed without notice. Valid from 2023.07.01 for deliveries until 2024.12.31.

<u>510</u>


DECK LAYOUT & CABIN CONCEPT



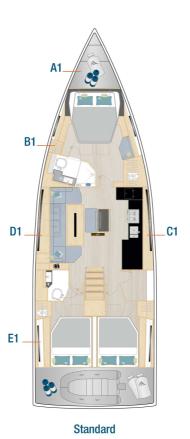






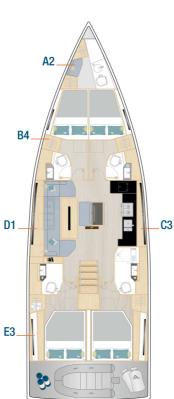

Option

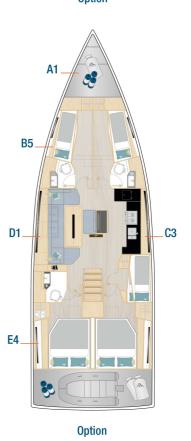





HULL

- -8 hull windows (4 each side)
- GRP hull, isophthalic gelcoat, colour: Signal White (similar RAL 9003), 1st layer vinyl ester resin and balsa sandwich laminat
- Waterline, isophthalic gelcoat, colour: Dark Grey (similar RAL 7043)

KEEL

- -L-keel, cast iron, draft: 2.43 m
- GRP rudder with sea-water resistant aluminium shaft and selfaligning bearings

LAYOUT & INTERIOR

- A1: Saillocker
- -B1: Master cabin with island double berth, 2 lockers, seating area and ensuite head with separate shower stall (only with A1 layout)
- -C1: Saloon with full functional large L-galley on stb (only with E1 or E2 layout)
- D1: Spacious saloon with large dining area with bar, libary and head on port
- -E1: 2 aft cabins with double berth, storage space and storage room on stb (only with C1 or C2 layout)
- 3-burner gas stove with oven, waste bin, 12 V fridge approx. 135 I, double stainless steel sink with mixing tab
- -Interior furniture in high quality marine plywood, Satin Varnish
- Hanse companionway closing system
- Saloon table, fixed
- Worktop in galley and heads Black Quartz

WOOD (FURNITURE, FLOORBOARD)

- Furniture Mahogany Style, Satin Varnish
- Galley cupboard fronts in wood colour
- Floorboard Acacia

UPHOLSTERY

- Mattrasses for all berths
- Upholstery Monte Carlo, colour: Cream

DECK & OUTSIDE EQUIPMENT

 - GRP deck with antislip surface, isophthalic gelcoat, colour: Signal White (similar RAL 9003), 1st layer vinyl ester resin with balsa sandwich core. 2 cockpit lockers, 1 space for life raft, dinghy garage, stowage for running rigging at helm position and in the

- steps from the cockpit to side deck, anchor locker at bow.
- Synthetic teak on cockpit bottom (colour selection)
- Synthetic teak on cockpit benches (colour selection)
- Synthetic teak on bathing platform (colour selection)
- Twin wheel steering system with emergency tiller
- -2 stainless steel steering wheels with leather cover
- Cockpit table, stainless steel with teak tops, on stb
- Cockpit table, stainless steel with teak tops, on ps
- Pulpit and pushpit, stainless steel
- Railing, incl. stanchions and stainless steel wire
- Covered halyards and control lines lead to cockpit helmposition,
 organizers and jammers, 4 mooring cleats, handrails on coach roof
- 2 LEWMAR 50 ST EVO manual halyard winches
- Bathing platform, manual fold-out with swimming ladder
- Composite bowsprit with integrated anchor and forestay fitting, gennaker eye
- Self tacking jib system
- Mainsheet system
- 8 large and 6 small deck hatches openable, anchor locker hatch
- 4 large coach roof side windows openable, 4 portlights in coach

RIG & SAILS

- Rig, anodized aluminium, deck stepped, with kicker, standing and running rigging and 2 reefs
- Backstay tensioner, manual
- Manual jib furler
- ELVSTRØM Dacron sails full battened, main and jib
- Dyneema halyards for main and jib

NAVIGATION & INSTRUMENTS

- Illuminated compass at each helm
- Navigation lights LED

PROPULSION

- Fuel tank, approx. 200 I
- Engine (Diesel, approx. 80 hp) saildrive, 3-blade fix propeller





EQUIPMENT

- 12 V and 230 V electric system with main panels and 230 V shore power and sockets in cabins and heads
- Battery set, capacity: 1x 90 Ah + 2x 160 Ah AGM
- Country Version: EU / AUS
- Battery charger 50 A
- Manual toilet with sea water flush cabin layout B1, B2 or B3
- Manual toilet with sea water flush cabin layout D1 or D2
- -LPG gas system, stowage for 1 gas bottle
- Black water system (appr. 85 I each bathroom) with deck extraction and seacock for head, electric and manual bilge pump
- Fresh water tank, appr. 450 I
- Fresh water system with electric pump and 40 I hot water, heated also by main engine

SHIPPING & TRANSPORT

- CE Certificate cat. A 12, B 14, C 18
- Owners manual
- EC Type Examination Certificate

